


FLAX EVO

PS 130 FE

Product Data Sheet

MADE IN
 FRANCE

2-way component kit

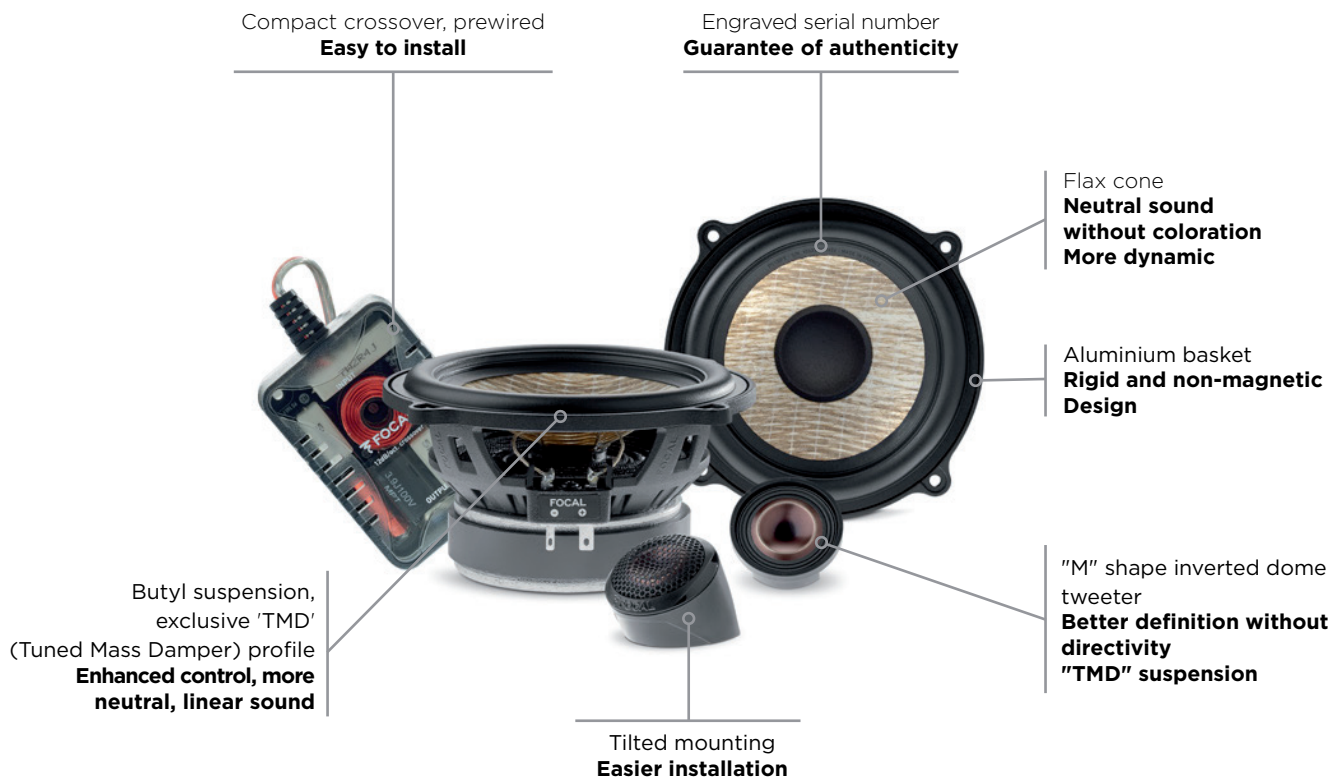

Key points

- High sensitivity
- Focal last technology
- Wider diffusion angle
- Unique and patented Flax cone (N°1350116)


Type	2-way component kit
Woofer	5" (130mm)
Woofer depth	2 ³ / ₈ " (59.7mm)
Cone	Flax sandwich
Tweeter	TAM tweeter (Aluminium/Magnesium 'M'-profile inverted dome tweeter)
Max. power	120W
Nom. power	60W RMS
Sensitivity (2.83V/3' 3³/₈" (1m))	90,5dB
Frequency response	75Hz-28kHz
Voice coil diameter	1" (25mm)
Magnet	Ferrite
Surround	TMD
Impedance	4Ω
Crossover	12dB/oct @3kHz

FLAX EVO

PS 165 FE

Product Data Sheet

2-way component kit

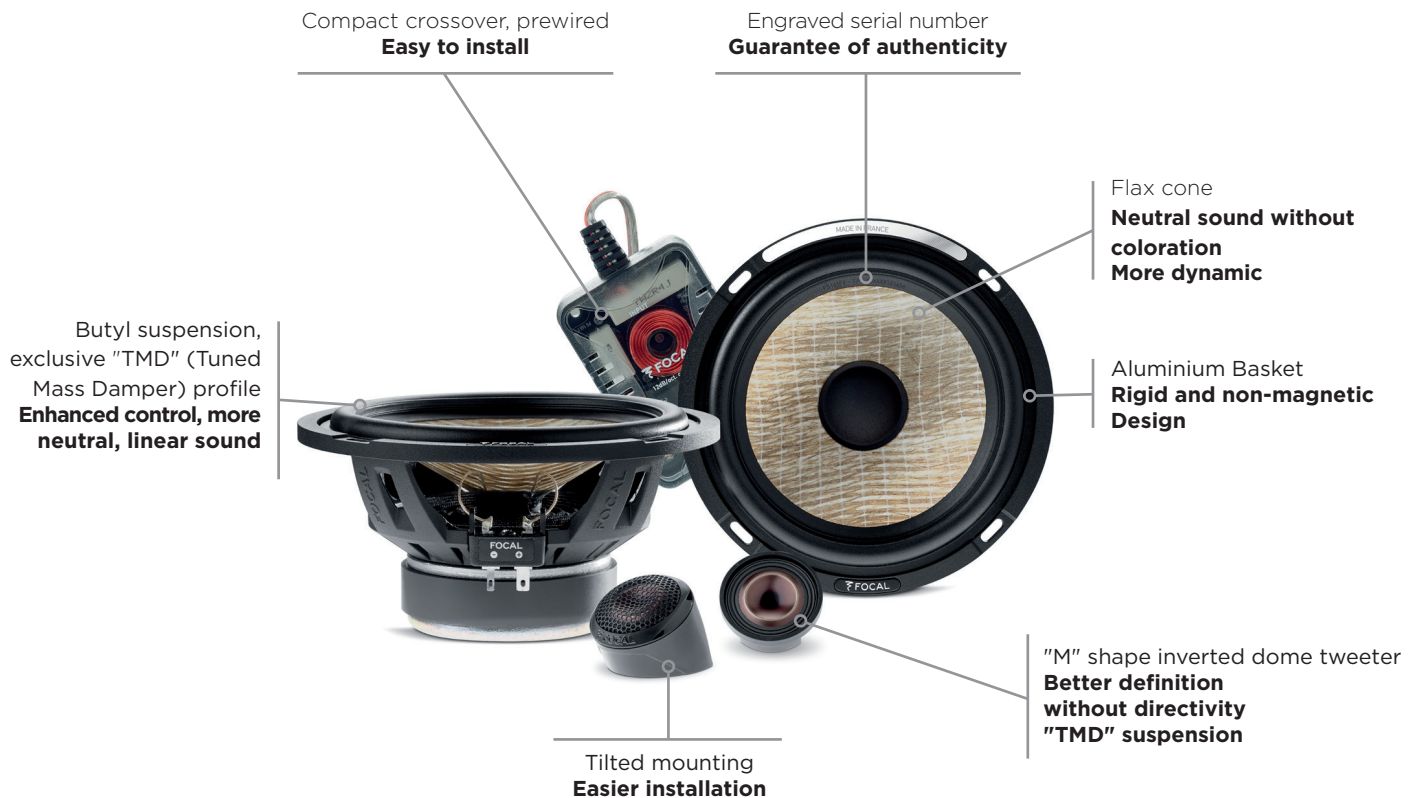

Key points

- High sensitivity
- Focal last technology
- Wider diffusion angle
- Unique and patented Flax cone (N°1350116)


Type	2-way component kit
Woofer	6 ¹ / ₂ " (165mm)
Woofer depth	2 ⁷ / ₈ " (72.7mm)
Cone	Flax sandwich
Tweeter	TAM tweeter (Aluminium/Magnesium 'M'-profile inverted dome tweeter)
Max. power	140W
Nom. power	70W RMS
Sensitivity (2,83 V/1 m)	91.5dB
Frequency response	60Hz-28kHz
Voice coil diameter	1" (25mm)
Magnet	Ferrite
Surround	TMD
Impedance	4Ω
Crossover	12dB/oct @3kHz

FLAX EVO PS 165 FXE

Product Data Sheet

MADE IN
FRANCE

2-way component kit

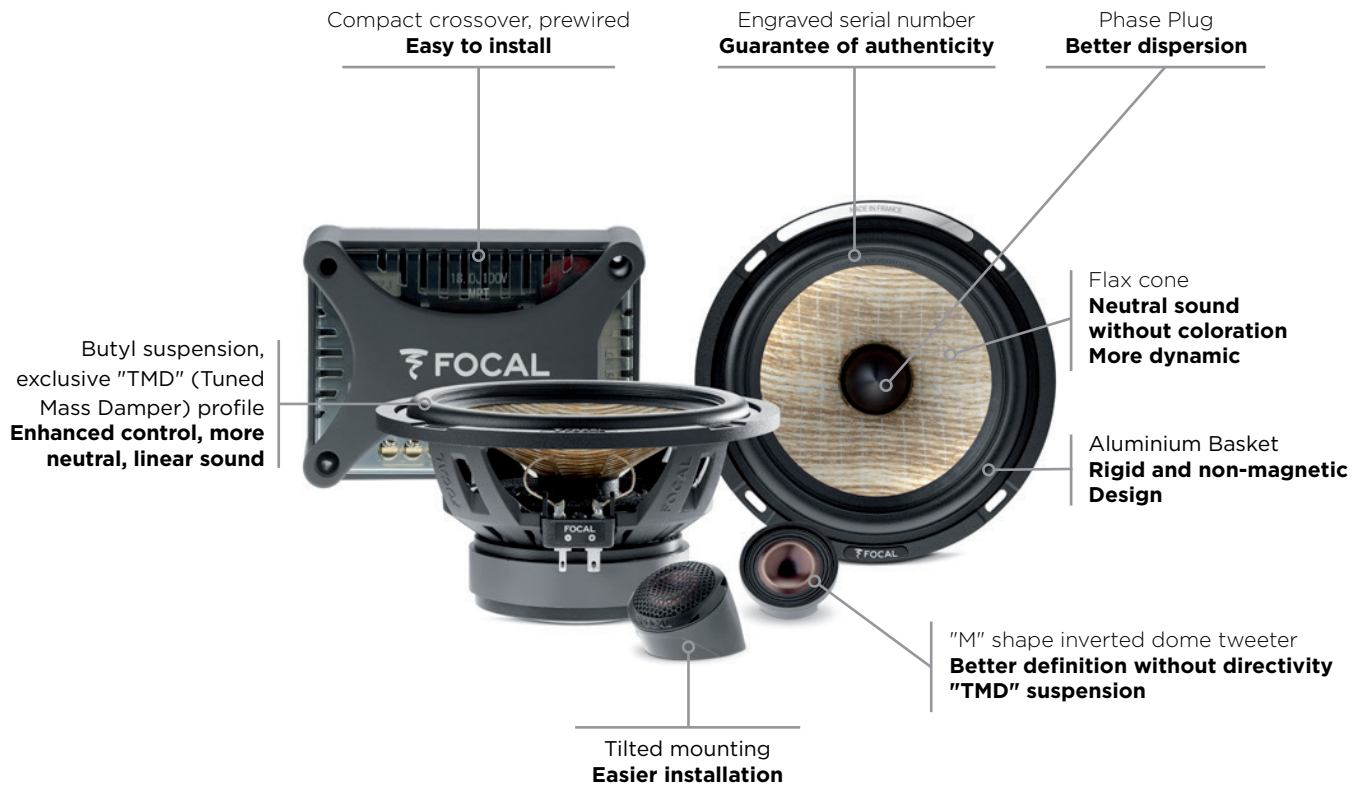

Key points

- High power handling
- Very low deep bass
- Bi-amp system (special crossover)
- Focal last technology
- Wider diffusion angle
- Unique and patented Flax cone (N°1350116)

Type	2-way component kit
Woofer	6 ¹ / ₂ " (165mm)
Woofer depth	3 ¹ / ₁₆ " (77mm)
Cone	Flax sandwich
Tweeter	TAM tweeter (Aluminium/Magnesium 'M'-profile inverted dome tweeter)
Max. power	160W
Nom. power	80W RMS
Sensitivity (2.83V/3' 3³/₈" (1m))	90.5dB
Frequency response	55Hz-28KHz
Voice coil diameter	1 ¹ / ₄ " (32mm)
Magnet	Ferrite
Surround	TMD
Impedance	4Ω
Crossover	12-18dB/oct @3kHz

FLAX EVO

PS 165 F3E

Product Data Sheet

3-way component kit



Key points


- High power handling
- Very low deep bass
- Compact midrange
- Wider diffusion angle
- Unique and patented Flax cone (N°1350116)

Type	3-way component kit
Woofer / Medium	6 ¹ / ₂ " (165mm) / 3" (80mm)
W. / M. Depth	2 ⁷ / ₈ " (72.7mm) / 1 ⁵ / ₁₆ " (33.5mm)
Cone	Flax sandwich
Tweeter	TAM tweeter (Aluminium/Magnesium 'M'-profile inverted dome tweeter)
Max. power	160W
Nom. power	80W RMS
Sensitivity (2,83 V/1 m)	90.5dB
Frequency response	60Hz-28kHz
W. / M. Voice coil diameter	1 ¹ / ₄ " (32mm) / 1" (25mm)
Magnet	Ferrite
Surround	TMD
Impedance	4Ω
Crossover	18dB/Oct @600-4000Hz

FLAX EVO PS 165 FSE

Product Data Sheet

2-way component kit

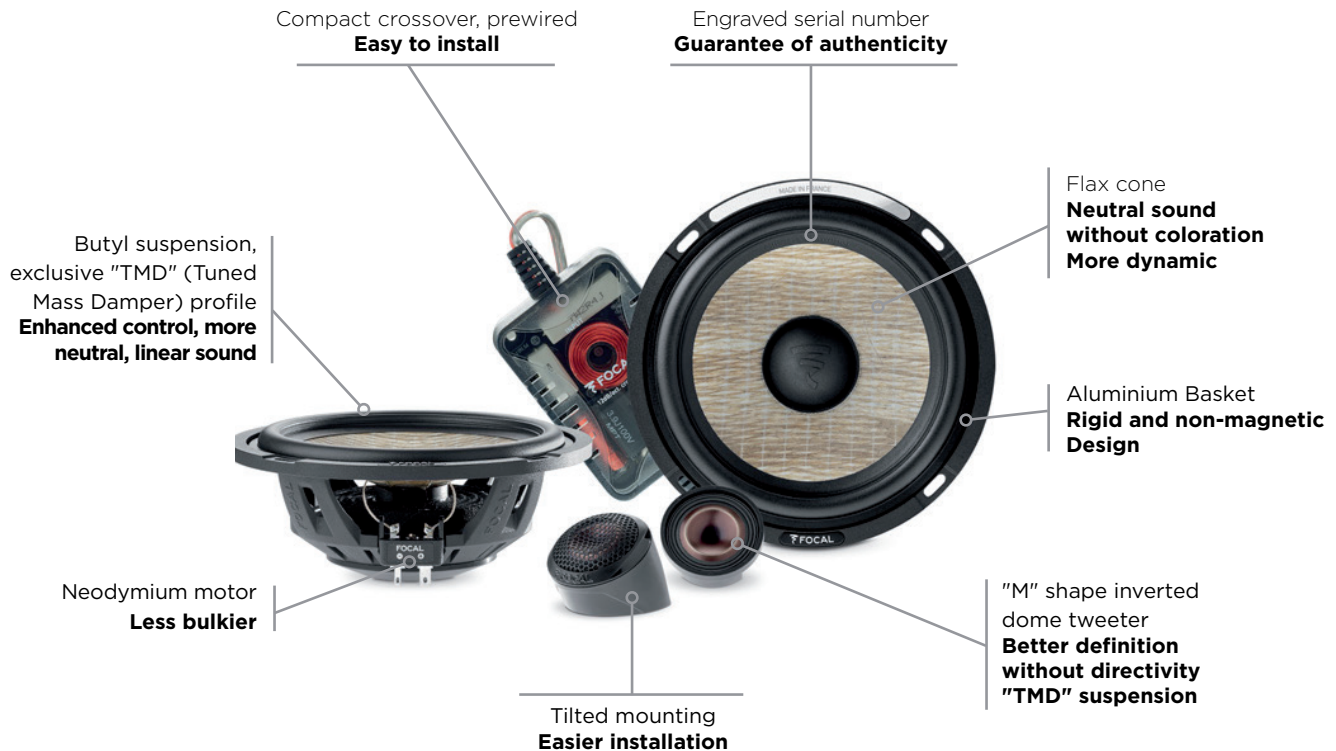

Key points

- High sensitivity
- Focal last technology
- Wider diffusion angle
- Unique and patented Flax cone (N°1350116)


Type	2-way component kit
Woofer	6 ¹ / ₂ " (165mm)
Woofer depth	2 ¹ / ₈ " (54.5mm)
Cone	Flax sandwich
Tweeter	TAM tweeter (Aluminium/Magnesium 'M'-profile inverted dome tweeter)
Max. power	120W
Nom. power	60W RMS
Sensitivity (2,83 V/1 m)	91.5dB
Frequency response	70Hz-28kHz
Voice coil diameter	1 ¹ / ₄ " (32mm)
Magnet	Neodymium
Surround	TMD
Impedance	4Ω
Crossover	12dB/oct @3kHz

FLAX EVO

PC 165 FE

Product Data Sheet

2-way coaxial kit

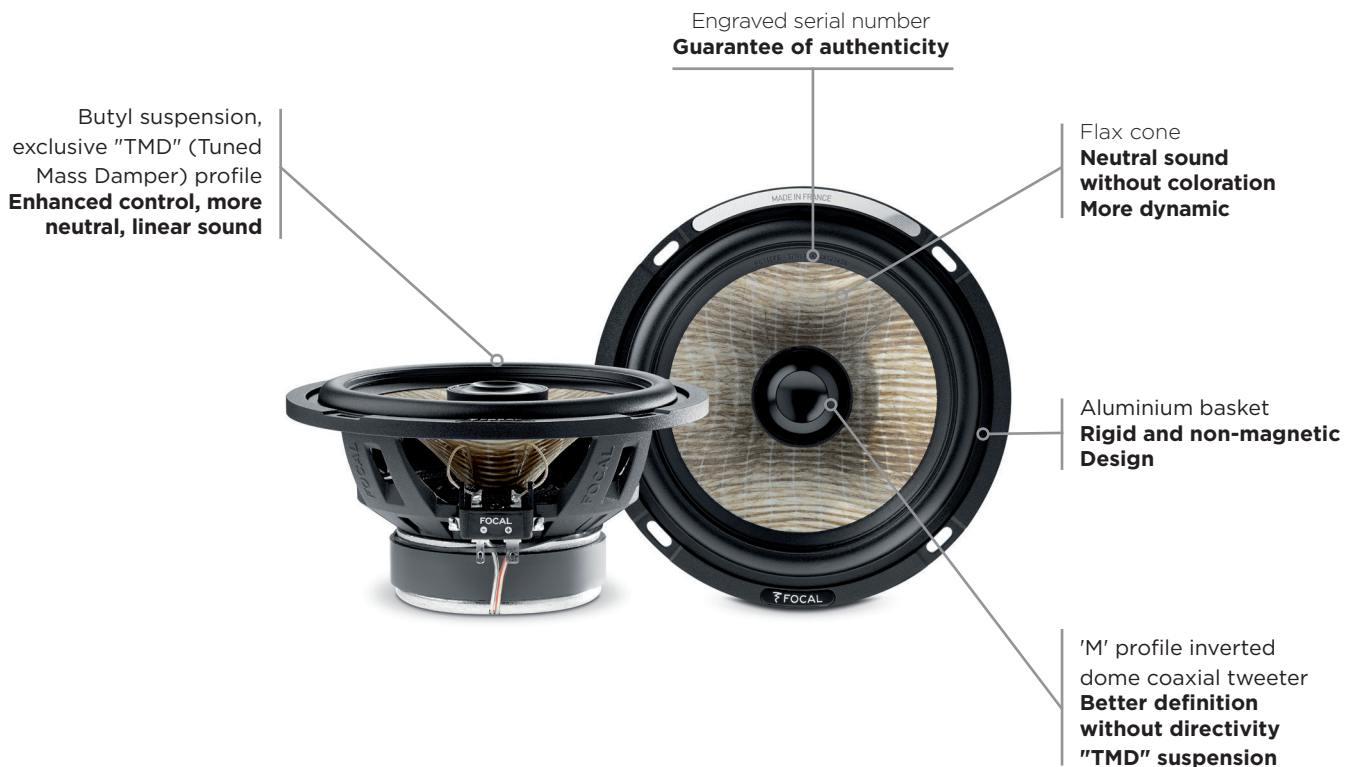

Key points

- High sensitivity
- Focal last technology
- Wider diffusion angle
- Unique and patented Flax cone (N°1350116)
- Integrated crossover

Type	2-way coaxial kit
Woofer	6 ¹ / ₂ " (165mm)
Woofer depth	2 ⁷ / ₈ " (72.7mm)
Cone	Flax sandwich
Tweeter	Aluminium/Magnesium 'M' profile inverted dome coaxial tweeter
Max. power	140W
Nom. power	70W RMS
Sensitivity (2,83V/1m)	90dB
Frequency response	60Hz-28kHz
Voice coil diameter	1" (25mm)
Magnet	Ferrite
Surround	TMD
Impedance	4Ω
Crossover	6dB/oct


FLAX EVO

P 25 FSE

Product Data Sheet

MADE IN
FRANCE

10" Shallow Subwoofer

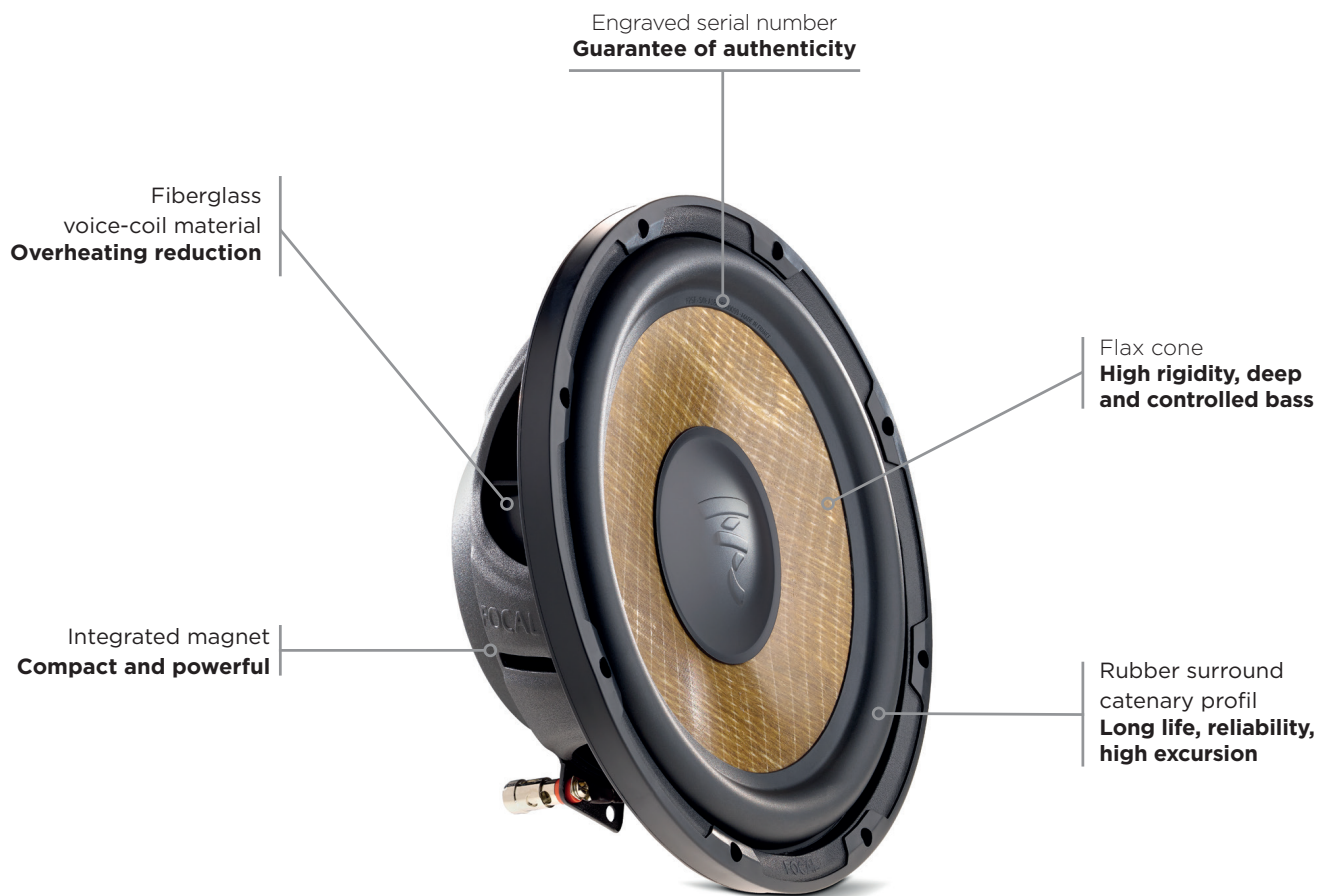

Key points

- Shallow and lightweight
- Flax technology for an exclusive cone
- Ideal for a small sealed enclosure volume using 0.28 cu.ft (8L)

Subwoofer	10" (250mm)
Voice coil diameter	1 1/2" (38mm)
Cone	Flax sandwich
Surround	Rubber
Max. power	560W
Nom. power	280W RMS
Sensitivity (2.83V/1m)	87dB
Impedance	4Ω